

Engine & Cooling	Fuel	Ignition	Electrical	Running gear	Torque settings	Capacities	Notes & Illustrations
------------------	------	----------	------------	--------------	-----------------	------------	-----------------------



Automotive Technical DATA BOOK

Click on one of the buttons above to view data for this car. To return to this screen and make another choice, click anywhere on the data screen.

MENU

HELP

Engine and cooling system 350i & Tasmin 1985 to 1992

Type		HPD V8
Capacity (cm ³) / number of cylinders		3528 / 8
Compression ratio / pressure	bar	9.75 / 9.0
Oil pressure	bar	[2.4]
Oil temperature	°C	80
Valve clearance - inlet	mm	0: Hyd.
- exhaust	mm	0: Hyd.
Firing order		1-8-4-3-6-5-7-2
No 1 cylinder position		FL
Thermostat opening temperature	°C	88
Radiator cap pressure	bar	1.0

Fuel system 350i & Tasmin 1985 to 1992

Idle speed - manual [auto]	rpm	800 to 850
Fast idle speed - manual [auto]	rpm	-
CO @ idle speed [3000 rpm] - see page VI	%	1.0 to 1.5
HC @ idle speed [3000 rpm] - see page VI	ppm	≤1200
CO ₂ @ idle speed [3000 rpm] - see page VI	%	-
O ₂ @ idle speed [3000 rpm] - see page VI	%	-
Carburettor / fuel injection		Lucas
Type / ref		L electronic
Main jet / needle		-
Injection pressure	bar	-
Pump pressure	bar	1.8 to 2.5
Octane rating	RON	97[L]

Ignition system 350i & Tasmin 1985 to 1992

Type		Electronic
Ignition coil		Lucas, Ducellier, Bosch
Primary resistance	ohms	0.6 to 1.0
Ballast resistor	ohms	-
Voltage - Tmnl 15(+) to earth	V	-
Distributor		Lucas
Points gap (air gap)	mm	[≥0.15]
Dwell angle	° (%)	-
Condenser capacity	µF	-
Rotation		Clockwise
Ignition timing - basic [static	° Crankshaft @ rpm	5 to 8 BTDC @ 600
V = Vacuum NV = No Vacuum		NV
Total ignition advance	° Crankshaft @ rpm	-
	° Crankshaft @ rpm	-
	° Crankshaft @ rpm	-
Centrifugal check.	° Crankshaft @ rpm	14±4 @ 2000
	° Crankshaft @ rpm	19±4 @ 3000
	° Crankshaft @ rpm	22±4 @ 5000
Vacuum range check	mbar	100 to 356
Maximum vacuum advance	° Crankshaft	14±4
Spark plugs		Unipart/Champion
Type		GSP151 or GSP4462 / RN9YC
Electrode gap	mm	1.0

Electrical system 350i & Tasmin 1985 to 1992

Battery	V / CC / RC	12 / 60Ah
Alternator voltage / full load current / engine rpm		13.6 to 14.4 / _ / 3000
Starter motor current / voltage - cranking	A / V	-
- locked	A / V	505 to 550 / _

Running gear 350i & Tasmin 1985 to 1992

Brakes -		
Front (min. friction material thickness)	mm	3.0
Rear (min. friction material thickness)	mm	3.0
Tyres		
Saloon	Size	205/60x15
Estate / Van	Size	-
Pressure - front / rear - Saloon	bar	1.5 / 1.7
- Estate / Van	bar	-
Front suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+3.2±1.5
Camber		0±0.5°
Castor		+3.5°±0.5°
King pin inclination		+6°
Rear suspension / wheel alignment		
Toe-in (+) / Toe-out (-)	mm [°]	+4.5±1.5
Camber		+0.5°±0.5°

Torque wrench settings 350i & Tasmin 1985 to 1992


Cylinder head - stage 1	Nm	Nos 1 to 10: 95
- stage 2	Nm	Nos 11 to 14: 68
- stage 3	Nm	-
- stage 4	Nm	-
Big-end bearings	Nm	47
Main bearings	Nm	75
Clutch cover	Nm	27
Flywheel [driveplate]	Nm	81
Front hubs	Nm	WSM
Rear hubs	Nm	271
Wheel nuts / bolts	Nm	95
Spark plugs	Nm	15

Capacities 350i & Tasmin 1985 to 1992


Engine oil & filter	litres	4.7
Gearbox - 4-speed [5-speed]	litres	1.9
Automatic transmission - refill	litres	-
Final drive	litres	1.5
Cooling system	litres	11.0
Fuel tank	litres	61

Notes and Illustrations


1: Idle speed 2: CO / Mixture

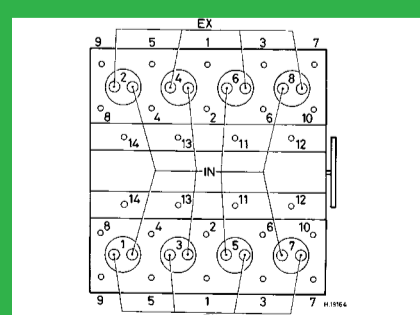

3528 cm³

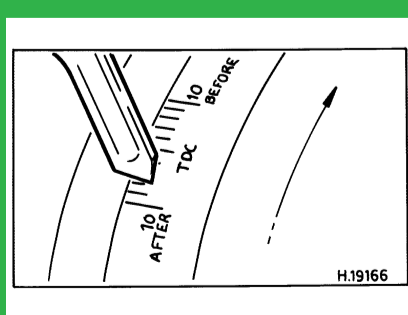

3528 cm³

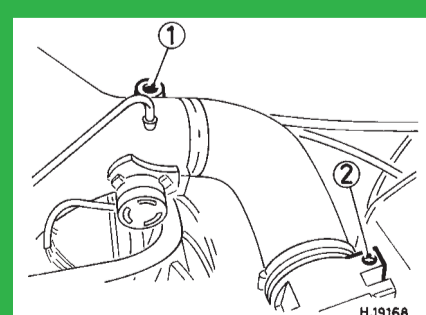

L electronic